

# Available Models



V3

V4

V6

## V Series Sizes

	Suction/Discharge	Maximum Capacity	Maximum Head	Maximum Solids
V3	4" (100 mm) 3" (75 mm)	700 gpm 44 lps	158' 48 m	2.5" 63.5 mm
V4	6" (150 mm) 4" (100 mm)	1150 gpm 72.5 lps	158' 48 m	3" 76.2 mm
V6	8" (200 mm) 6" (150 mm)	1900 gpm 123 lps	168' 51 m	3" 76.2 mm

## Materials of Construction

Cast Iron, Stainless Steel fitted, CD4MnCu fitted, G-R Hard Iron fitted



VS3

VS4

VS6

## VS Series Sizes


	Suction/Discharge	Maximum Capacity	Maximum Head	Maximum Solids
VS3	4" (100 mm) 3" (75 mm)	700 gpm 44 lps	315' 96 m	2.5" 63.5 mm
VS4	6" (150 mm) 4" (100 mm)	1150 gpm 72.5 lps	310' 94.5 m	3" 76.2 mm
VS6	8" (200 mm) 6" (150 mm)	1900 gpm 123 lps	325' 99 m	3" 76.2 mm

## Materials of Construction

Cast Iron, Stainless Steel fitted, CD4MnCu fitted, G-R Hard Iron fitted

## V Series – Composite of Performance Curves

Curves are based on a specific gravity of 1.0

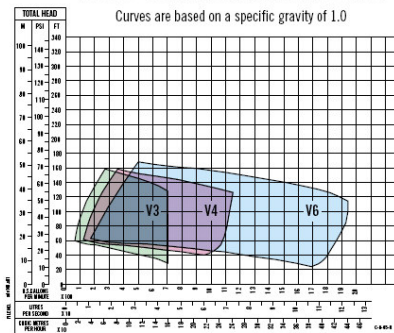

## VS Series – Composite of Performance Curves

Curves are based on a specific gravity of 1.0

